



REPAIR KIT FOR G320RC/G320PUM (krm32001)



Cover, TR

Screw
(Hex 2.5mm)

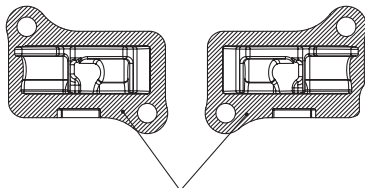

Area to apply

■ Assembling of the Cover, TR

1. Apply the liquid gasket (Three Bond TB1217F) when assembling the Cover, TR.

❗ IMPORTANT

Apply a thin layer. Do not let the liquid gasket enter the cylinder. This could cause damage to the engine.

2. Tighten the four screws.
Requested tightening torque: 1.3N·m
Limit: 1.0N·m ~ 1.5N·m

CAUTION !

This kit is **NOT** cover by KYODO Outdoor Power Products warranty policy.

KYODO OUTDOOR POWER PRODUCTS Co., Ltd.

7th Floor KUIPO Bldg. 2-1 Ichigaya-honmura cho, Shinjuku-ku,
Tokyo, 162-0845 Japan
Phone: (+81) 3-6457-5972 Fax: (+81) 3-6265-3646